



**DURA-HAUL**

HAUL WITH THE PROS.




# BEAVER TAIL TRAILER



movingforward@durahaul.com  
US toll free 844-877-6221

[www.durahaul.com](http://www.durahaul.com)

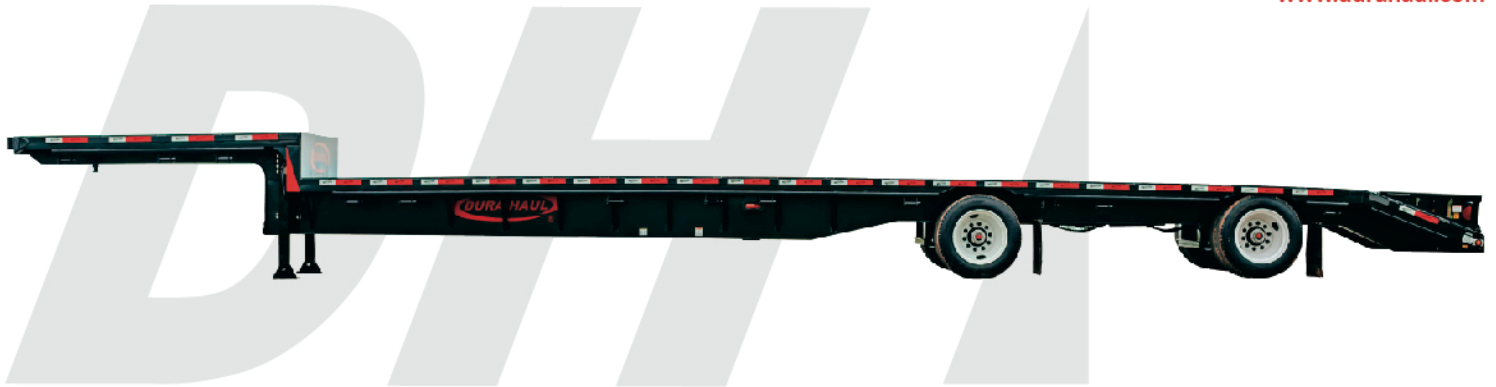

- » **Capacity**  
80,000 lbs GVWR.
- » **Length**  
53'.
- » **Weight**  
13,420lbs +/- 3%.
- » **Ramps**  
4'6".
- » **Upper Deck Length**  
10' 5".
- » **Lower Deck Length**  
38'.
- » **Upper Deck Height**  
61".
- » **Lower Deck Height**  
41.5".
- » **Width**  
102" Overall.
- » **Coupler Height**  
48".
- » **King Pin**  
Setting 24".
- » **Plate**  
1/4".
- » **Main Beam**  
26" High Tensile Steel.
- » **Web**  
Grade 80 High Tensile Steel.
- » **Front Skirt**  
Formed Steel with Tapered Corners.
- » **Rear Skirt**  
Formed Steel with Integral Stake Pockets.
- » **Cross Members**  
4" Steel I-beam on 12" centers.
- » **Side Rail**  
6" Steel Channel.
- » **Rub Rail**  
1/4" x 2-1/2" Steel.
- » **Stake Pockets**  
Steel, External Mount, 24" on center with double pipe spools.
- » **Floor**  
1-1/8" Oak Rough Finish Hardwood.
- » **Lighting**  
Lights Full DOT approved LED sealed lights.
- » **Load Securement**  
Sliding Winch C-track.
- » **Mud Flaps**  
Heavy Duty, White.
- » **King Pin**  
2" Holland.
- » **Landing Gear**  
Jost - Heavy Duty, 2-speed Gear Drive, 160,000 lbs static load capacity.
- » **Suspension**  
Heavy Duty Air Ride, 25,000lb Capacity.
- » **Axles**  
Heavy Duty, 25,000 lbs capacity.
- » **ABS Brakes**  
Bendix, 2S1M.
- » **Parking Brakes all Axels**
- » **Brakes**  
16 1/2" x 7" Quick Change
- » **Hubs**  
Standard Cast, Oil lubricated, 10-stud unimount, hub piloted.
- » **Brake Drums**  
Standard Cast, outboard mount.
- » **Wheels**  
Hub piloted steel.
- » **Tires**  
22.5"
- » **Winches (12)**
- » **Winch Track Steel Slide Driver Side**
- » **5 step painting process**
  - ✓ Sandblasting.
  - ✓ Acid wash.
  - ✓ Phosphate treatment.
  - ✓ Heated silicon treatment.
  - ✓ Powder coat finish.



**HAUL WITH THE PROS.**